



Republic of the Philippines
SOUTHERN LEYTE STATE UNIVERSITY
 Main Campus, Sogod, Southern Leyte
 website: www.slsuonline.edu.ph
 email: slsuonlinecampus@gmail.com/
 op@slsuonline.edu.ph telefax: (053) 577-8299



Bids & Awards Committee

Supplemental/Bid Bulletin No. 01


**RE-BIDDING – LOT 4 (ICT & OFFICE EQUIPMENT)
 SUPPLY, DELIVERY, INSTALLATION & COMMISSIONING OF
 SCIENCE LABORATORY FACILITIES – PB 2020-G&S-03**

This Addendum No. 01 is issued to modify or amend items in the Bid Documents. This shall form an integral part of the Bid Documents.

LCD PROJECTOR	
Technical Specifications	
From:	To:
Front/Side Ports : Card reader: Yes	Resolution : XGA (1,024 x 768) WUXGA (1,920 x 1,200)
Audio jack(s): 2	Aspect Ratio : 4:3 (Native), 16:9 (Supported)
USB 3.0 port(s): 2	Contrast Ratio : 20,000:1
Rear I/O Ports : HDMI port(s): 2 (out)	Displayable Colors : 1.07 Billion Colors
LAN port(s): 1	Brightness : 4,000 ANSI Lumens (Standard), 3,200 ANSI Lumens (ECO), (Compliant with ISO 21118 standard)
Audio jack(s): 3	Projection Screen Size: 23" ~ 300" (58cm ~ 762cm) (Diagonal)
USB 2.0 port(s): 4	Projection Distance : 1.0m ~ 11.8m (3.3' ~ 38.7')
USB 3.0 port(s): 1"	Lamp Type : Philips 220W
Number of PCIe x16 slot(s): 1	Lamp Life : 4,500 Hours (Standard), 10,000 Hours (ECO), 15,000 Hours (ExtremeEco)
Number of PCIe x1 slot(s): 1	Lamp Life of ExtremeEco mode is based on an industrial standard of educational usage cycle, which consists of 45 minutes of Full, ECO and/or Dynamic modes, 75 minutes of ExtremeEco (lowest lamp power) mode and 15 minutes of Power Off mode
M.2 slot (for SSD): 1	Ceiling Mounting Capability: Yes
M.2 slot (for WLAN): 1	Audio : 3W Speaker x 1
Power Supply : 300W CR	Weight : 2.65 Kg (5.8 lbs)
Accessories : Wired Keyboard and mouse	Dimensions : 315 x 214 x 98 mm (12.4" x 8.4" x 3.8")
Display port : DVI to D-Sub	Remote Control : IR remote control PgUp/PgDn functions
Monitor : Acer R231 bmid 23" Monitor	Power Supply : AC input 100~240V, 50/60 Hz
VGA + DVI + HDMI	Power Consumption: 260 Watts (Standard), 200 Watts (ECO), <0.5 Watts (Standby)
Operating System : Win 10 SL 64 Bit	Noise Level : 32 dBA (Standard), 24 dBA (ECO)
Warranty : 1 Years Part - 1 Years Labor Only (1-1-0)	Input Interface : 2 x Analog RGB/Component Video (D-sub)

	<ul style="list-style-type: none"> 1 x Composite Video (RCA) 1 x S-Video (Mini DIN) 1 x HDMI/MHL (Video, Audio, HDCP) 1 x HDMI (Video, Audio, HDCP) 1 x PC Audio (Stereo mini jack)
Output Interface :	<ul style="list-style-type: none"> 1 x Analog RGB (D-sub) 2 x PC Audio (Stereo mini jack) 1 x DC Out (5V/2A, USB Type A)
Control Interface :	<ul style="list-style-type: none"> 1x USB (Type A) 1 x share output port RS232 (D-sub)
Standard Accessories:	<ul style="list-style-type: none"> AC power cord VGA cable Remote control Battery for remote control Lens cap Quick start guide Security card

This Supplemental/Bid Bulletin No. 01 is issued this 16th day of July, 2020 for guidance and information of all concerned.

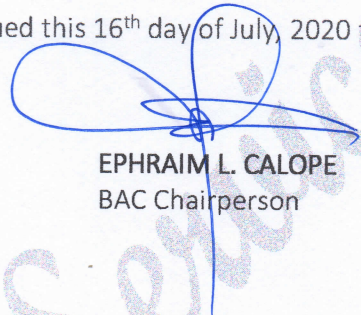

EPHRAIM L. CALOPE
BAC Chairperson

Goods & Services